





"The reliable choice for your process"

STANDARD VERSION



BASE MOUNTING VERSION




STANDARD VERSION

MODEL NO	MOTOR RPM	KW	CONNECTION SUCT	DISCH	A	B	C	DIMENSIONS			D	E	F	G	H	L
JP 405-236 / JP 405-230	3600 / 3000	1.5	51	38	88	60	200	350	185	230	230	335	560			
JP 405-336 / JP 408-330	3600 / 3000	2.2	51	38	88	60	200	350	185	230	230	335	560			
JP 408-536	3600	3.7	51	38	88	60	220	370	195	260	260	380	620			
JP 609-530	3000	3.7	51	51	100	55	220	370	195	260	260	380	620			
JP 609-736 / JP 609-730	3600 / 3000	5.5	63	51	100	55	260	410	220	315	300	454	740			
JP 609-1036	3600	7.5	63	51	100	55	260	410	220	315	300	454	740			
JP 905-1030	3000	7.5	63	63	118	65	260	410	220	315	300	454	740			


BASE MOUNTING VERSION

MODEL NO	MOTOR RPM	KW	CONNECTION SUCT	DISCH	A	B	C	DIMENSIONS			D	E	F	G	H	L
JP 405-236 / JP 405-230	3600 / 3000	1.5	51	38	88	60	150	300	185	230	230	335	560			
JP 405-336 / JP 408-330	3600 / 3000	2.2	51	38	88	60	150	300	185	230	230	335	560			
JP 408-536	3600	3.7	51	38	88	60	180	330	195	260	260	380	620			
JP 609-530	3000	3.7	51	51	100	55	180	330	195	260	260	380	620			
JP 609-736 / JP 609-730	3600 / 3000	5.5	63	51	100	55	220	370	220	315	300	454	740			
JP 609-1036	3600	7.5	63	51	100	55	220	370	220	315	300	454	740			
JP 905-1030	3000	7.5	63	63	118	65	220	370	220	315	300	454	740			

BASE MOUNTING VERSION



FRAME MOUNTING VERSION





BASE MOUNTING VERSION

MODEL NO	MOTOR RPM	KW	CONNECTION SUCT	DISCH	A	B	C	DIMENSIONS			D	E	F	G	H	L
JP910-F1536 / JP915-F1530	3600 / 3000	11	76	63	118	65	250	420	327	420	254	505	840			
JP 910-F2036	3600	15	76	63	118	65	250	420	327	420	254	505	840			
JP 910-F2536	3600	18.5	76	63	118	65	250	420	327	420	254	505	840			


FRAME MOUNTING VERSION

MODEL NO	MOTOR RPM	KW	CONNECTION SUCT	DISCH	A	B	C	DIMENSIONS			D	E	F	G	H	L
JP910-F1536 / JP915-F1530	3600 / 3000	11	76	63	118	65	270	440	327	420	254	505	840			
JP 910-F2036	3600	15	76	63	118	65	270	440	327	420	254	505	840			
JP 910-F1536	3600	18.5	76	63	118	65	270	440	327	420	254	505	880			
JP 915-F3036	3600	22	76	63	118	65	290	460	340	420	250	550	920			



JEC - Always a Step Ahead

JP SERIES CENTRIFUGAL PUMPS

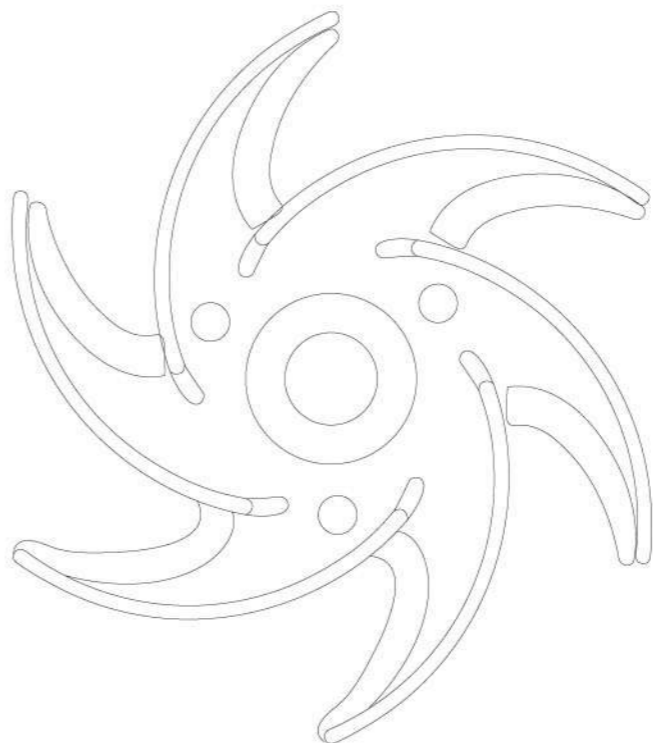

JEC
P U M P S

VSP COMPONENTI PER INDUSTRIA ALIMENTARE E FARMACEUTICA

0331 / 13.51.403
0331 / 15.86.028

✉ vsp-italia@libero.it

🌐 www.pompealimentari.it

3IP

High Pride
Higher Performance
Highest Quality



JEC Ltd. specialise in the field of sanitary pumps.

JEC was established in 1990 and started producing sanitary pumps utilising precision cast and pressed parts for the first time in Korea. Since then JEC has been successfully supplying to the process industries centrifugal, rotary and self-priming pumps, as well as blenders. JEC pumps are now renowned for reliability both for general duties and special application. JET's success is built upon high quality manufacture and customer satisfaction. Our policy is one of long term vendor partnerships.

Good relations with our customers are prerequisite to our growth.

JEC considers exchanging ideas their customers of the highest importance.

It is our belief JEC customer support fully meets customer expectations and contributes towards their prosperity.

We are always striving to make every effort to start new initiates.

The JEC philosophy is one of continuous improvement and keeping promises.



Our pride is created by high quality!

In all sectors of the beverage and food processing industries, JEC JP Series pumps have proven successful by absolute reliability, low energy consumption, perfect CIP clean ability and low noise level. Special feature of the JEC pump is high efficiency which gives low energy consumption. the basis for this is the unique spiral-shaped casing and the double curved impeller. the design reduces friction and turbulence and gives a better suction capacity (low NPSH) at the same time as the pumped product is handled very gently.




JP series Centrifugal Pumps

JEC - Always a Step Ahead


- The JEC JP Series pumps are ideal for hygienic application in field of dairies, food, beverage, pharmaceutical and other industries where acid-proof steel is resistant to the liquids to be pumped.
- The pumps come from long - term developed activities and experiences in the production of pumps combiend with detailed knowledge of products and their processing
- All parts in contact with the liquid - casing, impeller and shaft - are made of AISI316 stainless steel.
- Designed for either CIP or manual cleaning
- Only one size of shaft seal is required for all JP series (except 205 series), so keeping a few parts in stock is simple and inexpensive.
- Further a single seal can be easily changed to double seal in minutes with just a few extra parts.
- Packing of EPDM rubber and others are available as required.
- The pump can deliver capacities up to 100m³/hr and head up to 80m.

MECHANICAL SEAL

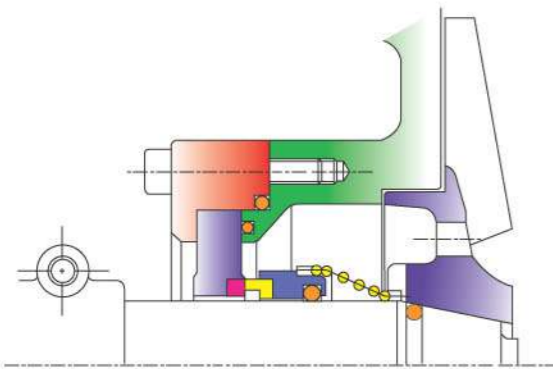

Standard Mechanical Seal


- Face materials
SiC/Carbon, SiC/SiC

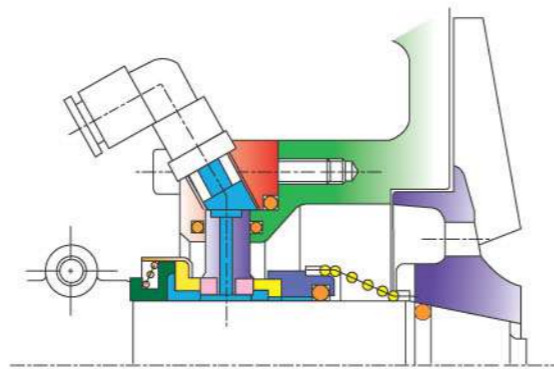


Flushed Mechanical Seal

- Elastomers
NBR, EPDM, Viton, PTFE, Carlez

PERFORMANCE COURVES

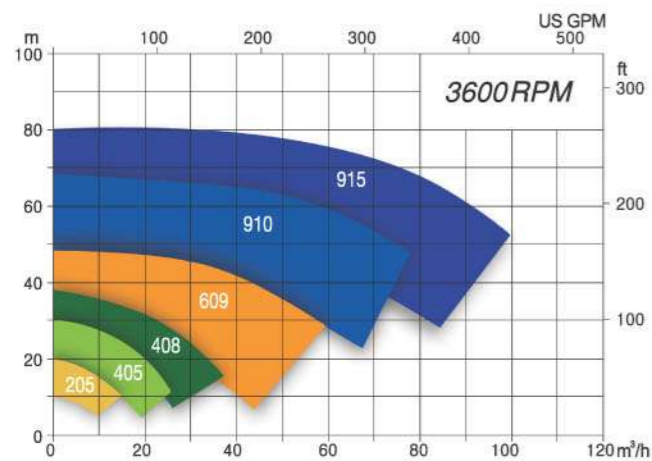

Performance data refer to water at 20°C, Permissible tolerance ±5%

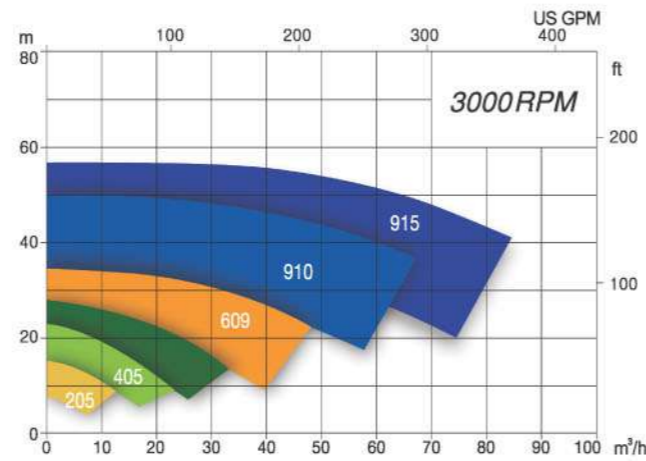

*“The higher the precision
the longer the span of product life”*



Our pride is created
by high quality!
JEC Sanitary Pumps